



EVC09_{HC}

Establishing a NEW STANDARD in the commercial refrigeration industry.

The new HC mid size footprint single door cooler is ideal for any checkout point, can fit in any space, and comes with spark-free components, eco-friendly refrigerant, and elegant design.



KEY FEATURES



ECO-FRIENDLY NATURAL REFRIGERANT

New R600 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



ELECTRONIC TEMPERATURE CONTROLLER

Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS


All HC models will have spark free refrigeration components for optimal safety, per UL requirements.




COMMERCIAL REFRIGERATOR AND/OR FREEZER 9242

NSF/ANSI 7 COMMERCIAL REFRIGERATOR AND/OR FREEZER 201Y


EVC09_{HC}



TOP VIEW

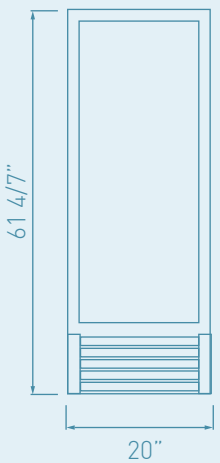

FRONT VIEW

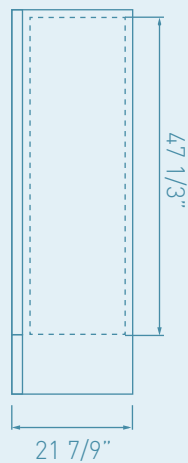

SIDE VIEW

PRELIMINARY

TECHNICAL SPECIFICATIONS

External Dimensions	H:	61 4/7"	156 cm
	W:	20"	51 cm
	D:	21 7/9"	55 cm
Internal Dimensions	H:	47 1/3"	120 cm
	W:	16 6/7"	43 cm
	D:	18 6/7"	48 cm
Volume		7.18 ft ³	203.2 lts
Doors	1		
Doors construction	Standard Black Plastic Frame		
Shelves	4		
20 oz bottle capacity	Total:		100

REFRIGERATION DATA

Refrigerant R600 (oz)	1.23	
Compressor (W)	103	
Condenser	Finless, (low maintenance)	
Evaporator	Dynamic	
Thermostat Setting	Cut-Out	Cut-In
	Default	32°F (0°C)

ELECTRICAL DATA

Power Supply (V)	115 v / 60 Hz	
Cord Length	118"	3000 mm
Plug type	PC-731	
Controller	Imbera ETC1H controller Pre-programmed temperatures	

LOGISTIC DATA

Unit Weight 141.5 Lbs 64.2 kg

Imbera USA L.L.C.
 1925 Shiloh Road, Building #2
 Kennesaw, GA 30144
 Ph. 678-504-6835

www.imberacooling.com

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

Printed in the USA.
 Dimensions rounded up to the nearest inch or millimeter.
 Specifications subject to change without notice.