Imbera
Beyond Cooling

G319 HC

Establishing a NEW STANDARD in the commercial refrigeration industry.

The new environmentally friendly HC large single door cooler features high tech, spark-free components that meet Coke requirements, and elegant design for a sophisticated product display.

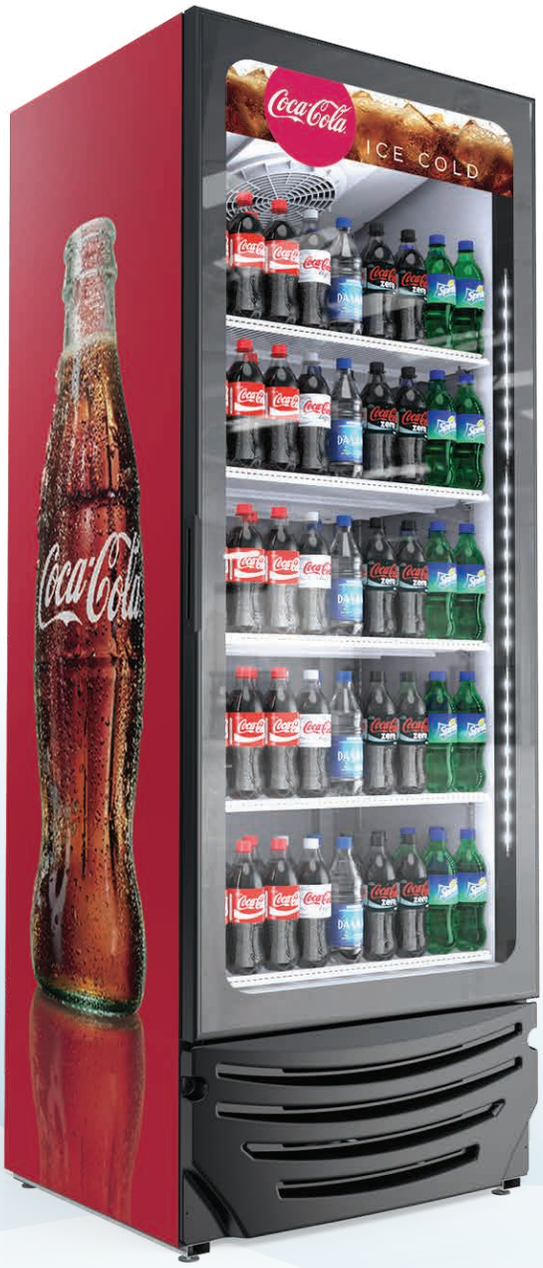

KEY FEATURES

ELECTRONIC TEMPERATURE CONTROLLER
Assures the optimal perfomance of the cooler, delivering product temperature ideal for consumption.

ECO-FRIENDLY NATURAL REFRIGERANT
New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.

ELECTRONIC FAN MOTORS
Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.

LOW MAINTENANCE CONDENSER
Designed to reduce dust & debris accumulation, which significantly reduces service frequency, run time, and guarantees refrigeration system longevity.

HIGH EFFICIENCY NGD DOOR
Equipped with our Next Generation Door (NGD), a sleek and innovative design with a self-closing hinge and double glass panels with low-e film that reduce condensation and increase overall consumer appeal.

LED LIGHTING SYSTEM
All our NGD doors come standard with a 220+ LUX of LED output, a 50% increase in brightness from our previous 150 LUX LED models, while maintaining extremely low energy consumption levels.

CFC AND HFC CYCLOPENTANE FOAM
Eco-friendly, recyclable and high efficiency cabinet insulation.

ENERGY STAR 4.0

c UL us LISTED
COMMERCIAL REFRIGERATOR AND/OR FREEZER
9Z42

CLASSIFIED UL EPH
NSF/ANSI 7 COMMERCIAL REFRIGERATOR AND/OR FREEZER
20YY

G319 HC



TOP VIEW

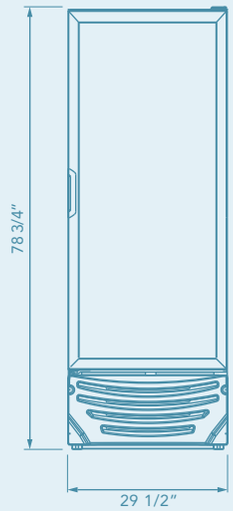

FRONT VIEW

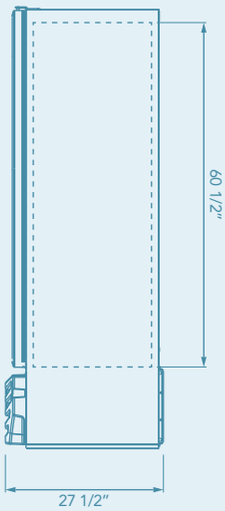

SIDE VIEW

TECHNICAL SPECIFICATIONS

External Dimensions	H:	78 3/4″	2000 mm
	W:	29 1/2″	750 mm
	D:	27 1/2″	700 mm
Internal Dimensions	H:	60 1/2″	1536 mm
	W:	25 1/2″	649 mm
	D:	21 3/8″	542 mm
Weight	Gross:	244.5 lb	110.9 kg
	Crated:	252.4 lb	114.5 kg
Volume		19.2 ft³	543.6 lts
Truck load	53′:		60
Doors	1		
Shelves	5		
20 oz bottle capacity	Total:		240
	Front:		8
	Gravity feed:		240

REFRIGERATION DATA

Energy Consumption (kWh/24h)	1.820*
Refrigerant R290 (oz)	2.29
Compressor (w)	341
Evaporator	Dynamic
Temp range	32°F to 44.6°F

ELECTRICAL DATA

Amps (A)	7.0	
Volts (V)	115	
Frequency (Hz)	60	
Lighting	LEDs	
Cord Lenght	118″	3000 mm
Plug type	NEMA 5-15P	

DANGER. Risk of fire or explosion. This equipment uses highly flammable refrigerant HC. Do not drill pipe cooling system.

IMBERA USA L.L.C.
245 TownPark Drive Suite 145
Kennesaw, GA 30144
www.imberacooling.com

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

Printed in the USA.
Dimensions rounded up to the nearest inch or milimeter.
Specifications subject to change without notice.