



# G319 HC

Establishing a NEW STANDARD in the commercial refrigeration industry.

Energy efficient, environmentally friendly, featuring spark-free components, low refrigerant charge and the most attractive product display.



## KEY FEATURES



### ECO-FRIENDLY NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



### ELECTRONIC TEMPERATURE CONTROLLER

Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



### ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



### NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



### LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



### SPARK-FREE REFRIGERATION COMPONENTS


All HC models will have spark free refrigeration components for optimal safety, per UL requirements.




COMMERCIAL REFRIGERATOR AND/OR FREEZER 9242

NSF/ANSI 7 COMMERCIAL REFRIGERATOR AND/OR FREEZER 201Y


# G319<sub>HC</sub>



TOP VIEW

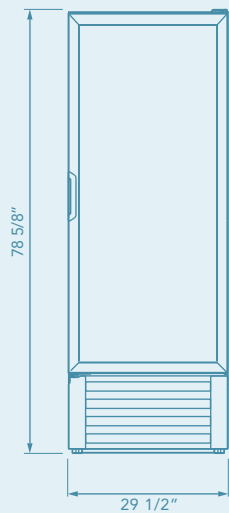

FRONT VIEW

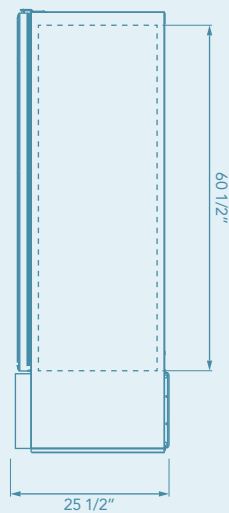

SIDE VIEW

## EXTRA OPTIONS



Gravity and extra shelves available with this model



Casters available with this model



Standard lock options available with this model

## TECHNICAL SPECIFICATIONS

<b>External Dimensions</b>	H:	78 5/8"	2000 mm
	W:	29 1/2"	750 mm
	D:	25 1/2"	660mm
<b>Internal Dimensions</b>	H:	60 1/2"	1536 mm
	W:	25 1/2"	647 mm
	D:	21 5/8"	549 mm
<b>Usable Internal Dimensions</b>	H:	60 1/4"	1275 mm
	W:	24 1/4"	617 mm
	D:	19 1/6"	484 mm
<b>Volume</b>		19.2 ft <sup>3</sup>	543.6 lts
<b>Doors</b>		1	
<b>Doors construction</b>		Standard Black Plastic Frame	
<b>Shelves</b>		5	
<b>Shelf Size &amp; Gauge</b>	W:	24 3/4"	630 mm
	D:	19 5/8"	497 mm
<b>20 oz bottle capacity</b>	Total:	240	

## REFRIGERATION DATA

<b>Refrigerant R290</b> (oz)	2.29	
<b>Energy Consumption</b> (kWh/24h)	1.820*	
<b>Compressor</b> (hp)	1/4	
<b>Condenser</b>	Finless, (low maintenance)	
<b>Evaporator</b>	Dynamic	
<b>Thermostat Setting Default</b>	<b>Cut-Out</b>	<b>Cut-In</b>
	32°F (0°C)	44.6°F (7°C)
<b>Noise</b>	55.30	

## ELECTRICAL DATA

<b>Power Supply</b> (V)	115 v / 60 Hz	
<b>Amps</b> (A)	7.0	
<b>Cord Length</b>	118"	3000 mm
<b>Lighting</b>	312 Lux output	
	9 modules	
	8 LED per module	
<b>Plug type</b>	PC-731	
<b>Controller</b>	Imbera ETC1H controller Pre-programmed temperatures	

## LOGISTIC DATA

<b>Trailer Loads</b>	53':	60	
	40':	42	
<b>Unit Weight</b> (w/packaging)	204.4 Lbs	109.1 kg	
<b>Dimensions</b> (w/packaging)	H:	82 5/8"	2100 mm
	W:	32 1/4"	820 mm
	D:	29 7/8"	760 mm

**Imbera USA L.L.C.**  
 1293 N. Post Oak Road, Suite 100, Houston, TX  
 77055  
 Ph. 678-504-6835  
[www.imberacooling.com](http://www.imberacooling.com)

\* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

Printed in the USA.  
 Dimensions rounded up to the nearest inch or millimeter.  
 Specifications subject to change without notice.