Imbera

VR27 CZ

Establishing a NEW STANDARD in the commercial refrigeration industry.

The new Imbera Coke *Contemporized* lineup features a full-length, rounded glass door for enhanced product visibility and larger packouts. Cabinet redesign includes aluminum door frame and rollers for easy maintenance.

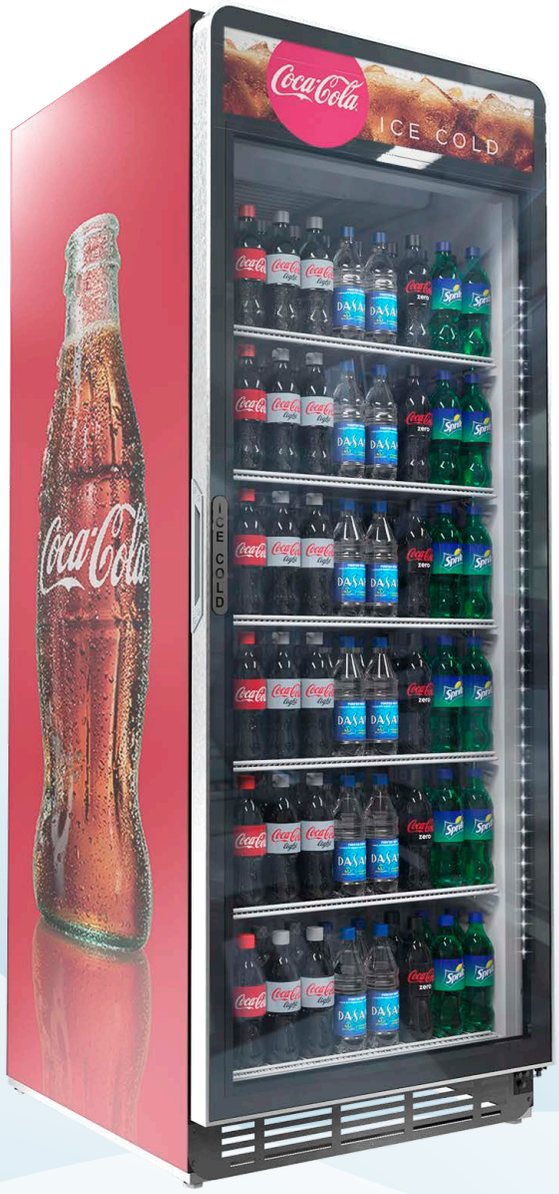

KEY FEATURES

ECO-FRIENDLY NATURAL REFRIGERANT
New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.

ELECTRONIC TEMPERATURE CONTROLLER & IOT CAPABILITIES
Patented *Wellington SCS Connect* electronic controller assures optimal performance through precision control, and comes with an extensive fleet management capability, including tracking, sales data, HACCP logging, smart maintenance and diagnostics.

ELECTRONIC FAN MOTORS
Enhances performance and efficiency. Improved even airflow that uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.

NEWLY DESIGNED CONDENSER
New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.

300 LUX LED AVERAGE ILLUMINATION
New 5th generation constant power high efficiency LED uses lowest energy possible, with highest light output.

COMPLETE CABINET REDESIGN
Full-length, rounded glass door with elegant aluminum frame , 300 LUX LED strips, and a durable pocket handle. Cabinets come with rollers for improved serviceability.

ENERGY STAR 4.0

c UL us LISTED
COMMERCIAL REFRIGERATOR AND/OR FREEZER
9Z42

CLASSIFIED UL EPH
NSF/ANSI 7 COMMERCIAL REFRIGERATOR AND/OR FREEZER
20YY

VR27 CZ

TECHNICAL SPECIFICATIONS

External Dimensions	H:	78 3/4″
	W:	30″
	D:	34 3/5″
Internal Dimensions	H:	70 1/2″
	W:	26 3/5″
	D:	28″
Usable Internal Dimensions	H:	63 3/4″
	W:	26 3/8″
	D:	25 1/8″
Volume		786.2 L
Doors	1	
Doors construction	Aluminum Frame	
Shelves	6	
20 oz bottle capacity	387	
12 oz bottle capacity	540	

REFRIGERATION DATA

Refrigerant R290 (oz)	2.29	
Energy Consumption (kWh/24h)	2.492	
Compressor (hp)	1/2	
Condenser	Low maintenance	
Evaporator	Dynamic	
Thermostat Setting Default	**Cut-Out** 32°F (0°C)	**Cut-In** 44.6°F (7°C)
Noise	TBD	

ELECTRICAL DATA

Power Supply (V)	115	
Amps (A)	3.1	
Cord Lenght	118″	3000 mm
Lighting	300 LUX on average	
Plug type	PC-731	
Controller	Wellington SCS Connect	

Imbera
1925 Shiloh Road, Building 2, Kennesaw, GA 30144
www.imberacooling.com

* Energy consumption based on TCCC standards.

Printed in the USA.
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.