



VRD41 SD 54 HC

Establishing a NEW STANDARD in the commercial refrigeration industry.

The new check-out bottle cooler with double sliding doors, offers broad capacity, high efficiency, and spark-free components that meet Coke requirements.



KEY FEATURES



ELECTRONIC TEMPERATURE CONTROLLER

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.



ECO-FRIENDLY NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.




ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



LOW MAINTENANCE CONDENSER

Designed to reduce dust & debris accumulation, which significantly reduces service frequency, run time, and guarantees refrigeration system longevity.



SLIDING DOORS

An alternative for reduced space establishments, its sliding effect keeps doors inside of the cooler cabinet. The internal springs make the doors go back up to the initial position by themselves.



LED LIGHTING SYSTEM

All our NGD doors come standard with a 220+ LUX of LED output, a 50% increase in brightness from our previous 150 LUX LED models, while maintaining extremely low energy consumption levels.



CFC AND HFC CYCLOPENTANE FOAM


Eco-friendly, recyclable and high efficiency cabinet insulation.




COMMERCIAL REFRIGERATOR
AND/OR FREEZER
9242

NSF/ANSI 7 COMMERCIAL REFRIGERATOR
AND/OR FREEZER
2019

VRD41 SD 54 HC




TOP VIEW

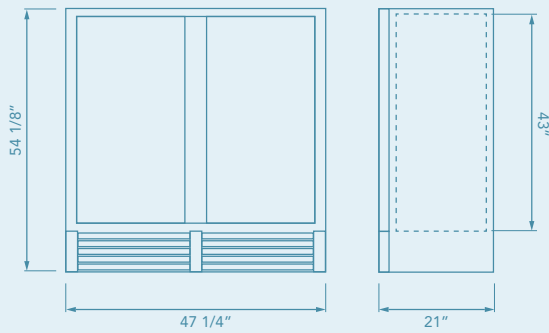

FRONT VIEW

SIDE VIEW

PRELIMINARY

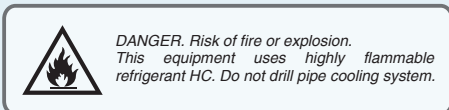

TECHNICAL SPECIFICATIONS

External Dimensions	H:	54 1/8"	1374 mm
	W:	47 1/4"	1197 mm
	D:	21"	534 mm
Internal Dimensions	H:	43"	1095mm
	W:	17"	431 mm
	D:	40 1/4"	1021 mm
Weight	Gross:	233.7 lb	106 kg
Volume		17.02 ft ³	481.9 lts
Capacity	53':		48
Doors		2	
Shelves		6	
20 oz bottle capacity	Total:		180
	Front:		6
	Depth:		5

REFRIGERATION DATA

Energy consumption (kWh/24h)	1.71
Refrigerant R290 (oz)	1.94
Compressor (w)	249
Evaporator	Dynamic
Temp range	32°F to 44.6°F

ELECTRICAL DATA

Amps (A)	2.2
Volts (V)	115
Frequency (Hz)	60
Lighting	LEDs
Cord Length	118" 3000 mm
Plug type	NEMA 5-15P



IMBERA USA LLC

245 TownPark Drive Suite 145
Kennesaw, GA 30144

www.imberacooling.com

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

Printed in the USA.
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.